


# Acer U5200 DLP Projector

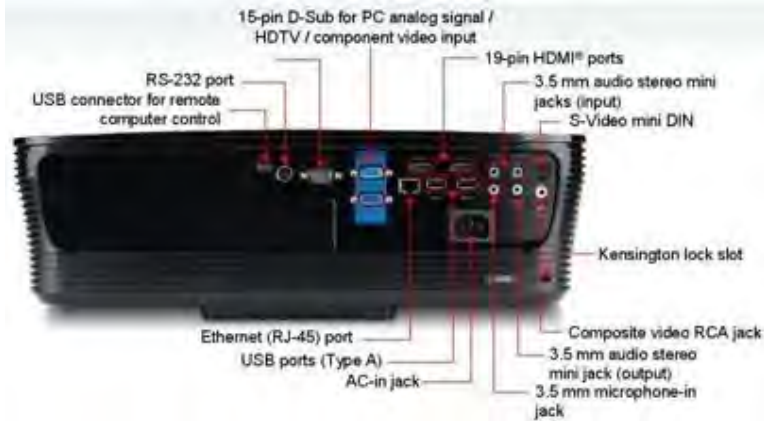

- Advanced digital connectivity to full HD devices
- Networked management tools for remote monitoring, control and reporting systems.
- At just 13cm (from rear side of projector to the wall), up to 77" image is displayed resulting in virtually no shadows when user is writing on the interactive board.
- DLP 3D ready

The new Acer projector U5200 was created to help the education system by implementing the new classroom teaching and learning.

|                        |   |
|------------------------|---|
| Display Panel          | 0.55" DarkChip™ 3 DMD   |
| Resolution             | Native XGA (1,024 x 768)<br>Maximum UXGA (1,600 x 1,200), 1080p (1,920 x 1,080)   |
| Computer Compatibility | IBM PC and Compatibles, Apple iMac/MacBook, and VESA Standards 1080p (1,920x1,080), WSXGA+ (1,680 x 1,050), WXGA+ (1,440 x 900), WXGA (1,280 x 800, 1,280 x 768), UXGA (1,600 x 1,200), SXGA+ (1,400 x 1,050), SXGA (1,280 x 1,024), XGA (1,024 x 768), SVGA (800 x 600), VGA (640 x 480) |
| Video Compatibility    | NTSC (3.58/4.43), PAL (B/D/G/H/I/M/N), SECAM (B/D/G/K/K1/L), HDTV (720p, 1080i, 1080p), EDTV (480p, 576p), SDTV (480i, 576i)  |
| Aspect Ratio           | 4:3 (Native), 16:9  |
| Contrast Ratio         | 4200:1  |
| Displayable Colors     | 1.07 Billion Colors   |
| Brightness             | 2,500 ANSI Lumens (Standard), 2,000 ANSI Lumens (ECO)   |

|                     |  |
|---------------------|--|
| Projection Lens     | F = 2.65, f = 3.50mm,<br>Manual Focus  |
| Projection Size     | 60" (152cm) ~ 300" (762cm) Diagonal  |
| Projection Distance | 1.0" (2.4cm) ~ 59" (149cm)   |
| Throw Ratio         | 77"@13cm (0.30:1)  |
| Horizontal Scan     | 30k ~ 100k Hz  |
| Vertical Refresh    | 50 ~ 120 Hz  |
| Lamp Type           | Replaceable UHP lamp   |
| Lamp Life           | 3,500 Hours (Standard), 5,000 Hours (ECO)  |
| Keystone Correction | +/-10 Degrees (Vertical ), Manual  |
| Projection Mode     | Front, Rear, Front-Ceiling, Rear-Ceiling   |
| Ceiling Mountable   | Yes  |
| Audio               | <b>20 watts speaker</b> (Two internal speaker with 10 watts output)  |
| Weight              | 15.4 lbs (7.0Kg)   |
| Dimensions          | 422 x 345 x 140 mm (16.6" x 13.6" x 5.5")  |
| Remote Control      | IR remote control with laser pointer & PgUp/PgDn functions   |
| Digital Zoom        | 2X   |
| Wireless Capability | Optional (By separate USB wireless adapter)  |
| Power Supply        | AC input 100~240V auto-switching power supply  |
| Power               | 380 Watts (Operation), <1 Watts (Standby, LAN off)   |
| Noise Level         | 33 dBA (Standard mode), 27 dBA (ECO mode)  |
| Input Interface     | Analog RGB/Component Video (D-sub) x 2 , Composite Video (RCA) x 1 , S-Video (Mini DIN) x 1 , HDMI (Video, HDCP) x 2 , PC Audio (Stereo mini jack) x 2, USB (Type A) x 2, USB (Mini-B) x 1 |
|                     | Mic In (Stereo mini jack) x 1  |

|                      |  |
|----------------------|--|
| Output Interface     | Analog RGB (D-sub) x 1 , PC Audio (Stereo mini jack) x 1   |
| Control Interface    | USB (Mini-B) x 1, shared with the one of Input Interface, RS232 (Mini DIN) x 1, 12V DC (Screen control) x 1  |
| Network Interface    | Ethernet port (RJ45) x 1   |
| Standard Accessories | AC power cord, VGA cable, Composite video cable, remote control, 2x battery for remote, carrying case, users guide, quick start guide, security card |